


Exhibit A

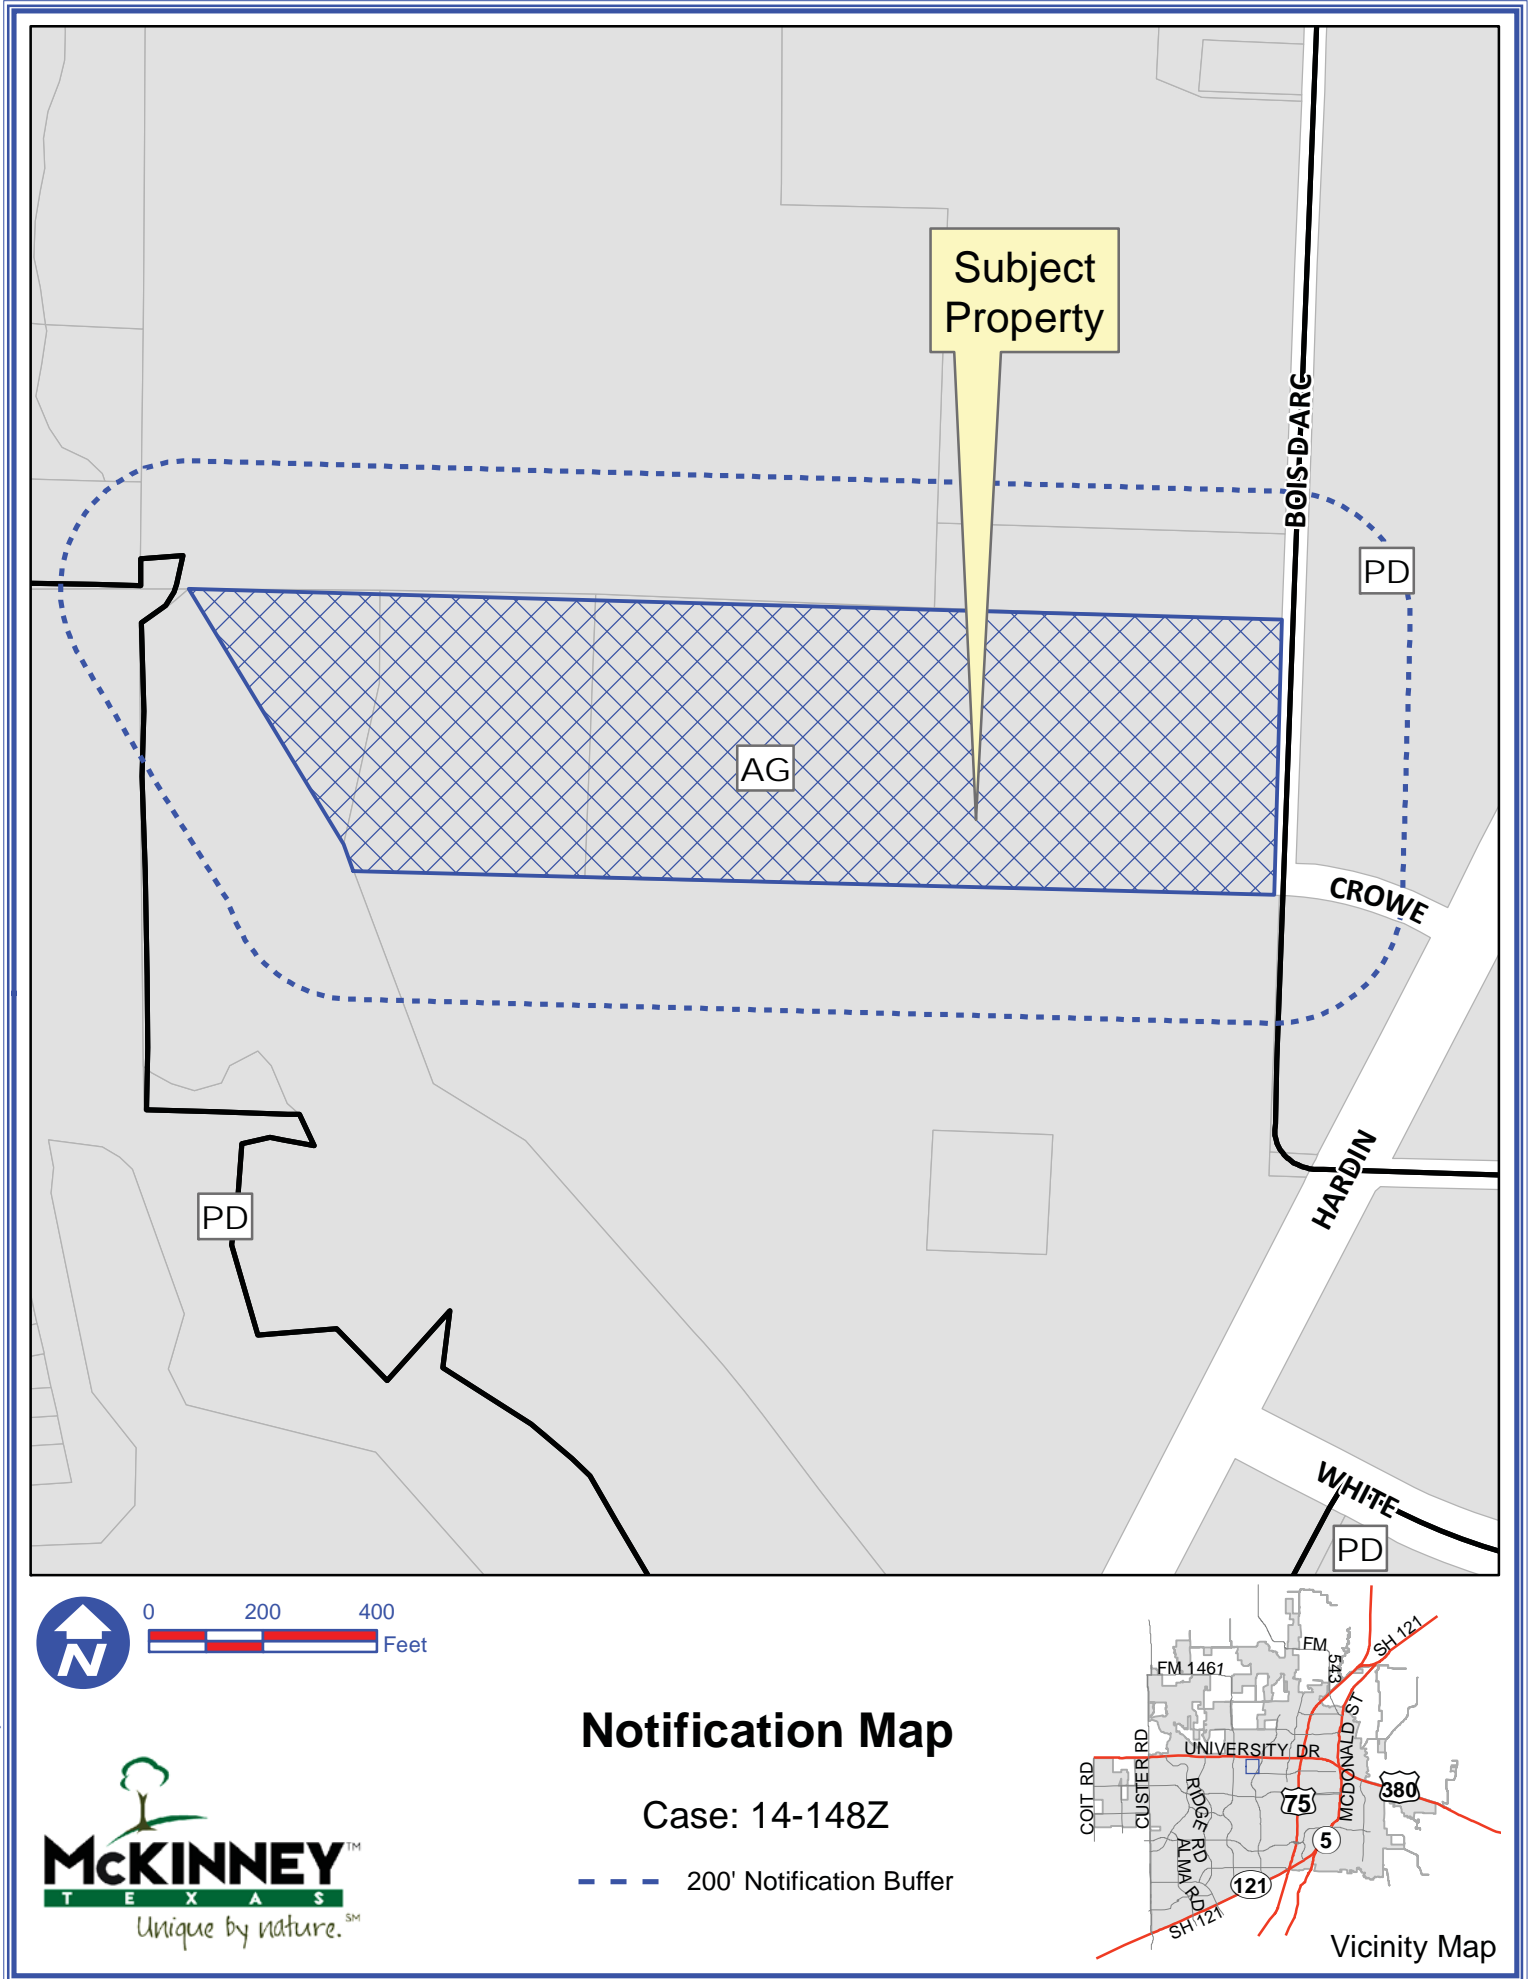

Path: S:\MCKGIS\Notification\Projects\2014\14-148Z.mxd

DISCLAIMER: This map and information contained in it were developed exclusively for use by the City of McKinney. Any use or reliance on this map by anyone else is at that party's risk and without liability to the City of McKinney, its officials or employees for any discrepancies, errors, or variances which may exist.

Exhibit B

METES AND BOUNDS DESCRIPTION

BEING a tract of land situated in the W. Hunt Survey, Abstract No. 450, City of McKinney, Collin County, Texas and being all of a tract of land conveyed to J.W. Cunningham according to the deed recorded in Volume 621, Page 250 and a portion of a tract of land conveyed to McKinney ISD according to the deed recorded in Volume 5870, Page 3893, and all of a tract of land conveyed to McKinney ISD according to the deed recorded in Volume 5870, Page 3878, Deed Records Collin County, Texas (DRCCT)

COMMENCING at an "X" found in the approximate centerline of Bois D' Arc road (an undedicated right-of-way) and being in the west line of Crowe Lane and being the northeast corner of said McKinney ISD tract;

THENCE, N 88°29'08" W, 30.00 feet along the south line of said Cunningham tract and the north line of said McKinney ISD tract to the POINT OF BEGINNING;

THENCE, N 88°29'08" W, 1596.30 feet along the south line of said Cunningham tract and the north line of said McKinney ISD tract and continuing to the west line of said McKinney ISD tract;

THENCE, along the west line of said McKinney ISD tract the following;

N 20°33'12" W, a distance of 49.41 feet;

N 28°57'00" W, a distance of 515.63 feet to the south line of a tract of land conveyed to Denvil Mixon recorded in Volume 737, page 751 (DRCCT);

THENCE, S 89°03'28" E, 313.66 feet along the south line of said Mixon tract to the common corner between said McKinney ISD tracts;

THENCE, S 89°23'39" E, 379.66 feet continuing along the south line of said Mixon tract to a 5/8" iron rod found for corner;

THENCE, S 88°30'44" E, 1189.36 feet continuing along said south line to a point in the future west right-of-way line of said Bois D' Arc road;

THENCE, S 02°14'21" W, 499.99 feet to the PLACE OF BEGINNING with the subject tract containing 864, 897 square feet or 19.855 acres of land.

Exhibit C

Architectural Standards

1. The following architectural and site standards shall apply to all residential units:
 - a. The following exterior finishing materials shall be required:
 - i. Front Elevation: 100% of this elevation, save and except second story walls that are not a vertical continuation of a first story wall, shall be finished with masonry materials including, but not limited to, brick, stone, synthetic stone, or stucco; however, no more than 50 percent of this elevation shall be finished with stucco.
 - ii. Side Elevation: 75% of this elevation, shall be finished with masonry materials including, but not limited to, brick, stone, synthetic stone, or stucco; however, no more than 50 percent of this elevation shall be finished with stucco. The remaining 25%, may be finished in wood lap siding, vinyl siding, cast concrete modular siding, or EIFS, as an alternative to masonry materials. Sheet siding fabricated to look like wood lap siding is prohibited.
 - iii. Rear Elevation: 50% of this elevation, shall be finished with masonry materials including, but not limited to, brick, stone, synthetic stone, or stucco; however, no more than 50 percent of this elevation shall be finished with stucco. The remaining 50%, may be finished in wood lap siding, vinyl siding, cast concrete modular siding, stucco, or EIFS, as an alternative to masonry materials. Sheet siding fabricated to look like wood lap siding is prohibited.
 - iv. Calculation of Percentages: The percentages set forth above shall be calculated exclusive of windows, doors, and/or dormers.
 - b. All residential units shall be required to provide at least three of the following architectural elements:
 - i. 100% of each wall is finished with a masonry material.
 - ii. The front façade contains two types of complementary masonry finishing materials with each of the materials being used on at least 25% of the front façade.

Exhibit C

- iii. A minimum of 10% of the unit's front façade features patterned brickwork, excluding soldier or sailor brickwork provided in association with a door or window.
- iv. The unit only features one-car garage doors that have a carriage-style design. The doors typically feature vertical slats, high windows, antiqued hardware, and additional detailing to give the appearance of swinging or sliding doors.
- v. The unit's chimney is finished on all sides with 100% masonry finishing materials.
- vi. A minimum of three offsets in the front façade measuring at least two feet deep are provided or a minimum of one offset in the front façade measuring at least five feet is provided.
- vii. The unit features an articulated front entrance through the use of lintels, pediments, keystones, pilasters, arches, columns, or other similar architectural elements.
- viii. A covered back porch which is at least 200 square feet in area is provided.
- ix. At least one dormer is provided for each roof plane over 500 square feet in area that faces a public street. The dormer must be appropriately scaled for the roof plan and shall not be wider than the windows on the building elevation below.
- x. All windows facing a street feature shutters. The shutters provided must be operational or appear operational and must be in scale with the corresponding window.
- xi. All ground level mechanical, heating, ventilation, and air conditioning equipment have an opaque screening device that is at least six feet tall.